




V-STAR 3+1 Zone Security Panel with GSM Base Auto Dialer LCD Based Key Pad

Technical Specification

- Supply Voltage : 9 VDC to 18 VDC
- Quiescent Current: 190 mA max.
- Operating Current: 200 mA max. (with speaker output)
- Activation: Three opt to isolated inputs NC or NO.
- N.C. Activation System activates when a zone "OPEN" detected.
- N.O. Activations system activates when a zone "close" detected.
- Voltage Activation : NC (Applied voltage : OVDC) NO (open or +VDC)
- Outputs: Response indicator & Hooter output.
- Response time: 200 m Sec.
- Operating temp.: -18° C to 55° C
- Dimension : 11" x 10" x 3.5"
- Weight : Net Weight 2.00 Kg. (approx.) without battery
- Gross wt. : 2.5 Kg. (approx.)
- Mounting: Wall or Flat Surface.
- Case Material : ABS resin plastic 1st Grade
- Color : White

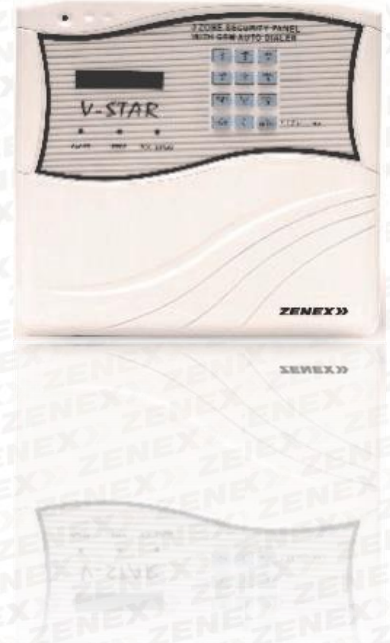

Salient & Unique Features of V Star (GSM Based Panel)

- 3+1 Zone security panel with GSM Auto dialer LCD & Onboard key pad.
- Remote programming from anywhere in the world through phone.
- Three different voice messages for 3 different zones.
- Different entry and exit delay for night mode.
- Editable co. banner display on LCD.
- Programmable day & night mode.
- LED for Record & play message.
- All zones are opt isolated.
- LCD display with 4 LED.
- Inbuilt 90db siren.
- LED for Response.
- LED for Power.
- LED for Alarm.

All zones are programmable NO / NC. Operation through Onboard key pad with LCD as well as with phone. 12 key back light key pad. User can operate through telephone line using DTMF instrument as well as by key pad. No. of ring after which panel respond is programmable. Panel can be armed and disarmed through phone. Code can change through remote. Built in battery backup provision. Individual zone status indication on display. Individual entry delay time 1 to 255 second. Individual exit delay time 1 to 255 second. Silent arming. Night mode arming. Nonvolatile memory. Open zone in built tamper switch. RF arming/disarming and panic. (Optional) Inbuilt auto dialer. Code protected programming. International look. All type of sensor are attachable. One of its kind system with response indicator. Very much suitable for small establishments like flats/offices/home/go down. 4 wire smoke sensor can be attached.

3+1 Zone Security Panel with GSM Base Auto Dialer (LCD Base Key Pad)

Specially Design for Small Establishments like Shops, Offices & Flats

*Designs and Specifications are subject to change without notice.